




Storage of flammable hazardous materials and chemicals...or...storage of tools and equipment such as lawn mowers and snow blowers. Sheds have textured surface - natural concrete colour - may be painted to suit. Sheds are delivered and set in place, providing the site is accessible by truck and prepared in advance.

- Vandal Resistant
- Durable - Permanent
- Portable - Just give us a call
- Maintenance Free
- Stable and Secure
- Hinges - Non Removable Pins (N.R.P.)

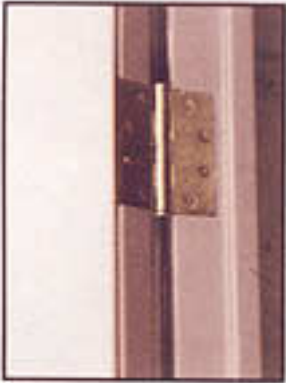

Powder Coated Finish Steel Door & Frame



Galvanized or Aluminum Vents



Commercial-keyed Schlage Dead Bolt lock



Chamfered Corners for safety



Sump floor contains spills on E Models

Environmental models, (E) - To insure protection against environmental damage and expense caused by spills of hazardous materials, all models are available with a "sump floor" to provide containment. These models are supplied with increased venting to conform to all M.O.E. and M.O.A. recommendations.

MODEL	LENGTH	WIDTH	HEIGHT	INSIDE	WEIGHT	VENTS	FIRE RATING
40	8'-4"	5'-6"	6'-7"	7'-7" x 5'x6'	9,000 lbs.	2- 8"x6"	3/4 Hr.
70	12'-8"	7'-0"	6'-10"	11'-11" x 6'-2"x6'	16,000 lbs.	3- 8"x6"	3/4 Hr.
40E	8'-4"	5'-6"	6'-7"	7'-7" x 5'x6'	9,000 lbs.	2- 18"x12"	3/4 Hr.
70E	12'-8"	7'-8"	6'-10"	11'-11" x 6'-2"x6'	16,000 lbs.	3- 18"x12"	3/4 Hr.
105	13'-5 1/2"	8'-4"	7'-10"	12'-5.5"x 7'-2" x6'-10"	24,820 lbs.	2- 18"x12"	3/4 Hr.

Construction models, 40, 40E, 70, 70E - Two piece steel reinforced, air entrained precast concrete construction with gasketed tongue and groove centre joints. Concrete strength - 4500 PSI minimum. Vertical corners chamfered 1/2". Sand-blasted exterior finish. (Exposed aggregate available - custom order).

Model 105 - Bolted panel assembly air entrained steel reinforced concrete. Exterior corners rounded. Brushtex or exposed aggregate exterior finish. Slip resistant interior floor.

Hardware - Frame - 1-3/4" x 2-7/8" custom roll-formed steel door frame, lag fastened to concrete and sealed with joint sealant.

Model 40 Single Door - One - 34-7/8"x67-1/2"x1-3/4" standard architectural steel door. Powder coat finish.

Model 70 Double Door - Two - 31-1/2"x70"x1-3/4" standard architectural steel doors. Powder coat finish.

Model 105 Double Door - Two - 36"x84"x1-3/4" standard architectural doors. Powder coat finish.

Locks - Schlage commercial keyed deadbolt lock (standard), complete with flush mount finger grip on all models. One door also barrel-bolts, top and bottom on two door models.