

- 1 Effortless parallel squeeze action draws sides inward and forward while keeping your livestock centered and balanced.
- 2 The fully reversible controls are smooth, fast, and efficient, even with an animal in the squeeze.
- 3 Grease zerts on all heavy hinge collars
- 4 Both sides can be opened from the working side for sorting or animal access
- 5 Each side is equipped with four side access panels which swing down and out of the way for clear, unobstructed access
- 6 All closed-in panels are caulked to minimize noise.
- 7 With two lower access doors on each side of the squeeze you have greater control over animal access. Lower access doors swing up and lock securely out of your way.
- 8 Optional Sternum Bar (item 1554) mounts to floor of squeeze to inhibit livestock from going down in the squeeze.
- 9 All latches and controls can be easily operated, even while wearing mitts.
- 10 Headgate handle is mounted on the outside frame to provide a faster response as well as keeping the operator safely out of the headgate opening
- 11 Neck Injection door. If the optional neck extender is added this door provides access for shoulder branding.
- 12 Superior quality 3/8" double braided nylon ropes on nylon wheels for years of smooth, trouble free operation.
- 13 Side pockets offer a safe and secure location to slide a back-up bar
- 14 Rear tailgate locks both up and down. The responsive rope control frees the handler to effectively work the animals flight zone. A built-in counterweight makes it easier to lift the tailgate.
- 15 The only parallel axis squeeze on the market with tapered sides
- 16 100% extra heavy duty steel construction
- 17 The heavy duty squeeze platform will accept most standard load bars.
- 18 Checkerplate floor with aggressive 1.25" traction ribs


To reduce bruising the headgate is mounted to the squeeze body with shock absorbing spring bolts. ¹

Extra heavy duty timing chain for a long smooth operation ²

Auto-catch position is set quickly and simply with limiter chain ³

Quick adjust plungers on the top and bottom of the headgate make it possible to adjust the headgate opening on the fly (no tools required) The opening can be set between 5" and 11 inches. ⁴

Bottleneck stanchion design. The bottom verticals of the stanchion are straight to eliminate the choking. The upper verticals bottleneck in at 48" height to minimize livestock head movement ⁵

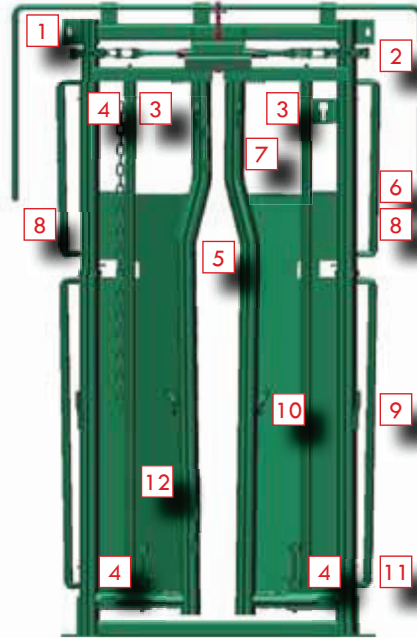

⁶ Independent stanchion latches. One handle releases the headgate either outward or inward, but never both. No risk of hip-lock with 180° swing

Pull headgate release toward the back of the squeeze to swing the headgate 90° into the squeeze.

Push headgate release toward the front of the squeeze to swing headgate 90° out from the squeeze

⁷ Safety guards protect the headgate latch from being released by livestock

⁸ Rope Dally cleats

⁹ Chain Latch

¹⁰ Pigtail chain retainers

¹¹ Grease zerts on all hinge collars

¹² The headgate is sheeted to protect livestock

¹ headgates sold in the US do not come with springs installed.



PARALLEL AXIS SQUEEZE WITH AUTO HEADGATE	
Outside Length	108"
Inside Length	96"
Outside Height	85"
Inside Clearance	72.5"
Base Width	40"
Outside Width	58"
Inside Width	32" to 12"
Weight	1,697 lbs
Item Number	1550

AUTO SQUEEZE HEADGATE	
Outside Height	76.5"
Inside Height: Clear	68"
Outside Width - Handles	50"
Outside Width - Frame	39"
Mounting Bolts -Centers	36"
Stanchion Adjustments - Top	3
Stanchion Adjustments - Bottom	3
Weight	295 lbs
Item Number	100

The Parallel Axis Squeeze Chute is also available with a neck restraint (Item 1551). The addition of the neck restraint will optimize access and control for neck injections. With the neck extender in place one can use the neck injection door to deliver shoulder brands. The neck extender is not recommended for those handling horned livestock. With the neck extender in place the headgate will swing in to a maximum opening width of 18". The neck extender can be simply removed at any time.



PARALLEL AXIS SQUEEZE WITH AUTO HEADGATE AND NECK RESTRAINT	
Outside Length	120"
Inside Length	96"
Outside Height	85"
Inside Clearance	72.5"
Base Width	40"
Outside Width	58"
Inside Width	32" to 12"
Weight	1,870 lbs
Item Number	1551

AUTO SQUEEZE HEADGATE WITH NECK RESTRAINT	
Outside Height	76.5"
Inside Height: Clear	68"
Outside Width - Handles	50"
Outside Width - Frame	41"
Mounting Bolts -Centers	36"
Stanchion Adjustments - Top	3
Stanchion Adjustments - Bottom	3
Weight	469 lbs
Item Number	106